



SPEL Stormsack

At-source Gross Pollutant Trap

www.spel.com.au

Stormwater Treatment

An all too common issue with today's highly impervious landscape is how to meet stormwater regulations with limited budgets and tight space constraints.

SPEL StormSack filtration solutions are highly engineered water quality devices that are deployed directly in the stormwater system to capture contaminants close the surface for ease of maintenance. Easily retrofitted into new or existing structures, SPEL StormSack filtration technology is a decentralized approach to stormwater treatment that essentially repurposes traditional site infrastructure and customizes it to meet specific site water quality goals. In this way, it satisfies important objectives of today's LID (Low Impact Development) criteria.

From an operations perspective, catch basins with SPEL Stormsack filters are also easier and quicker to clean out because pollutants are trapped just under the grate.


StormSack

The SPEL StormSack is specifically designed for the capture of gross pollutants: sediment, litter, and oil and grease. Ideally suited for municipal storm drain retrofits, the SPEL StormSack's unique design allows maintenance to be performed using conventional vacuum suction equipment.



Application	Regulatory Issue	Target Pollutants
Council Storm Drain Retrofits	At-source litter capture	Sediment, Litter, O&G
Commercial/Retail/Residential	Stormwater Compliance	Sediment, Litter, O&G
Litter Prone Urban Areas	Cost effective litter control	Litter \geq 5 mm
Scrap Metal/Solid Waste/Oil Storage/Etc	Industrial Multi-Sector General Permit	Gross Pollutants, O&G
Part of Treatment Train	Council Stormwater Quality Improvement Targets	Sediment, Litter, O&G
Construction Sediment/Erosion	Sediment Control Plan	Sediment/Erosion Control

Features	
1.	Durable, aluminum frame construction
2.	Integral oil boom effectively captures oil and grease from spills
3.	Patented dovetailed flange – allows 12cm of length/width field adjustment
4.	Polypropylene netting protects sack from suction hose during maintenance
5.	Steel clip with locking tab holds replaceable filter sack in place
6.	Baffled bypass traps floatables

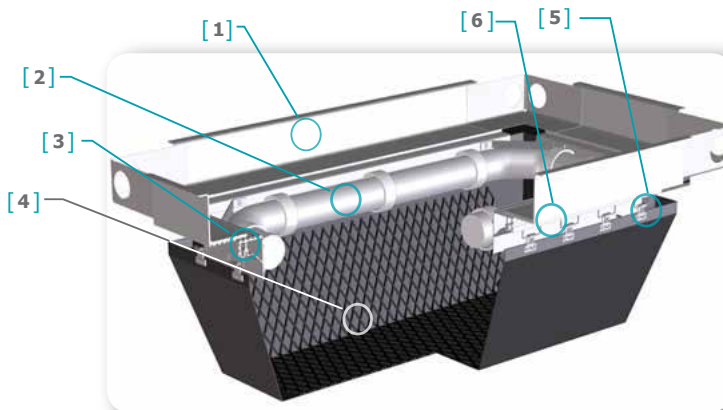

Standard SPEL Stormsack to suit Pit Sizes
450x450mm
600x600mm
900x600mm
900x900mm

Custom sizes (i.e. 1200x900mm) can be manufactured on short lead times

Specifications & Details


General Description

This technology is a post developed stormwater treatment system. The SPEL StormSack provides effective filtration of solid pollutants and debris typical of urban runoff, while utilising the existing or new storm drain infrastructure. The StormSack is designed to rest on the flanges of conventional catch basin frames and is engineered for most hydraulic and cold climate conditions.

Installation And Maintenance

Installation procedures shall include removing the storm grate, cleaning the ledge of debris and solids, measuring catch basin clear opening and adjusting flanges to rest on grate support ledge. Install SPEL StormSack with splash guard under curb opening so the adjustable flanges are resting on the grate support ledge. Install corner filler pieces. Reinstall storm grate directly on support flanges [rise shall be no more than 1/8 inch (3 mm)].

Maintenance: Typically the SPEL StormSack is serviceable from the street level, and therefore maintenance does not require confined space entry into the catch basin structure. The unit is designed to be maintained in place with a vacuum hose attached to a sweeper or a vactor truck. The oil boom is also designed to easily be replaced from the street level. Use only SPEL replaceable parts.

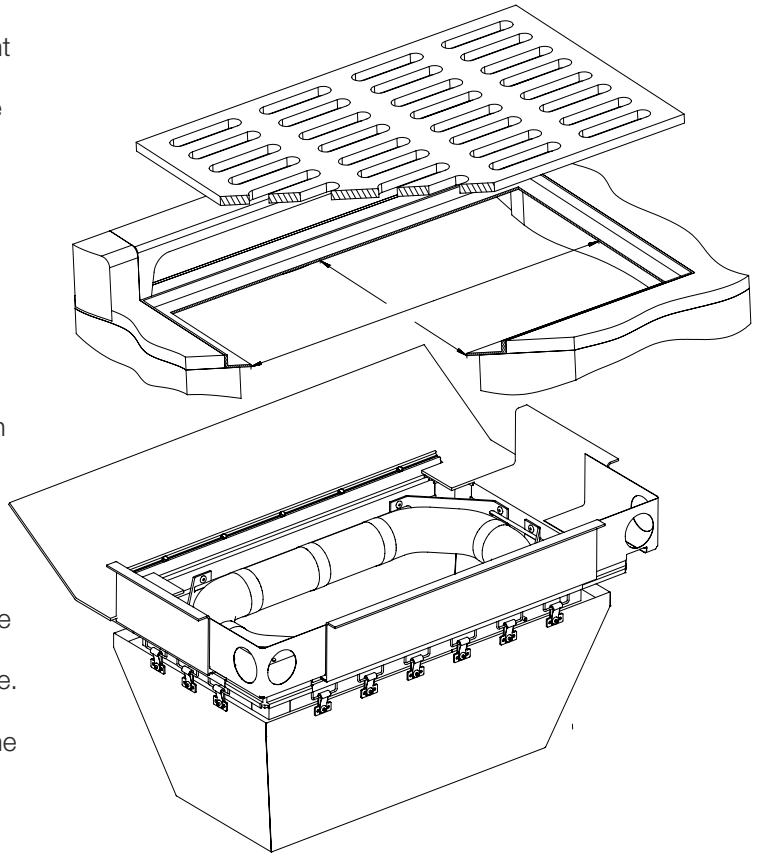

Products

Material and Design

- A. Adjustable Flange and Deflector: Aluminum Alloy 6063-T6
- B. Splash Guard: neoprene rubber
- C. Stormsack: woven polypropylene geotextile with US Mesh 20
- D. Corner Filler: Aluminum Allow 5052-H32
- E. Lifting Tabs: Aluminum Allow 5052-H32
- F. Replaceable Oil Boom: polypropylene 3 inch (76 mm) diameter
- G. Mesh Liner: HDPE, diamond configuration
- H. Support Hardware: CRES 300 Series

Typical Performance Characteristics

- A. Debris capacity: 8.5cu. ft. (0.24 m³)
- B. Filtered flow rate: 7.3 cfs (207 lps)
- C. Primary baffled bypass flow rate: 4.2cfs (119 lps)
- D. Secondary bypass flow rate: 0.4 cfs (10 lps)
- E. Total bypass flow rate: 4.6 cfs (130 lps)
- F. Oil boom sorption capacity: 376 oz (11 L)

Recommended minimum clearance from bottom of SPEL StormSack to inside bottom of vault is 2 inches (50 mm)
Typical frame adjustability range of 5 inches (127 mm) in each direction.

Benefits

- Low cost gross pollutant capture
- Quick & easy installation
- Simple maintenance
- At source capture
- Adjusts to custom pit sizes

Field Performance

The SPEL Stormsack was introduced to the Australian market in 2012 and field testing is underway at several locations in South-east Queensland. Laboratory testing has shown capture of 99.99% of gross pollutants up to the bypass flow rate.* Further results will be provided as they become available.



HEAD OFFICE

PO Box 6144
Silverwater NSW 1811

100 Silverwater Rd
Silverwater NSW 2128

Phone: +61 2 8705 0255

Fax: +61 2 8014 8699



DESIGN OFFICES

New South Wales 61 2 8705 0255

Canberra 61 2 6128 1000

Queensland 61 7 3271 6960

Victoria & Tasmania 61 3 5274 1336

South Australia 61 8 8275 8000

West Australia 61 8 9350 1000

Northern Territory 61 2 8705 0255

New Zealand 64 9 276 9045



www.spel.com.au

SPEL Environmental accepts no responsibility for any loss or damage resulting from any person acting on this information. The details and dimensions contained in this document may change, please check with SPEL Environmental for confirmation of current specifications.